

Count Indicator

MXDU—HT—001

[Instruction Manual 1.0.1]

This product displays the number of tags detected by Hiyari Hunter and notifies the approach of the vehicle equipped with a trigger detection box.

The contents of this document are subject to change without notice for improvement, including product specifications. The contents of this document are as of January 2018.


⚠ Precautions for use

- Please do not remodel or disassemble.
- Do not subject to severe impact.
- Do not leave in a place that touches the hands of the infant.
- Do not put foreign objects in.
- Do not place anything on top of this product.
- Do not use in places with high humidity or dust, oil smoke or steam.


Main specifications

Supply voltage	DC24V (Supplied by control unit with included relay cable)
7-segment LED	Display 0 to 7 (lights up when tag possession worker approaches)
Powered ON LEDs	green
Warning LEDs	Red (lights up when vehicle approach detection)
Operating temperature range	0°C~50°C
Operating humidity range	10 to 90% Rh (non-condensing)
External dimensions	(W)110mm (D)150mm (H)40mm ※Excluding protrusions
quality	300g ※Excluding connection cable

connection

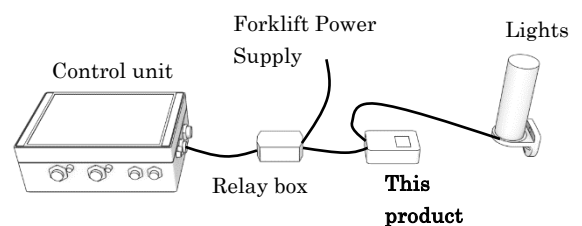

Product appearance and name of each part

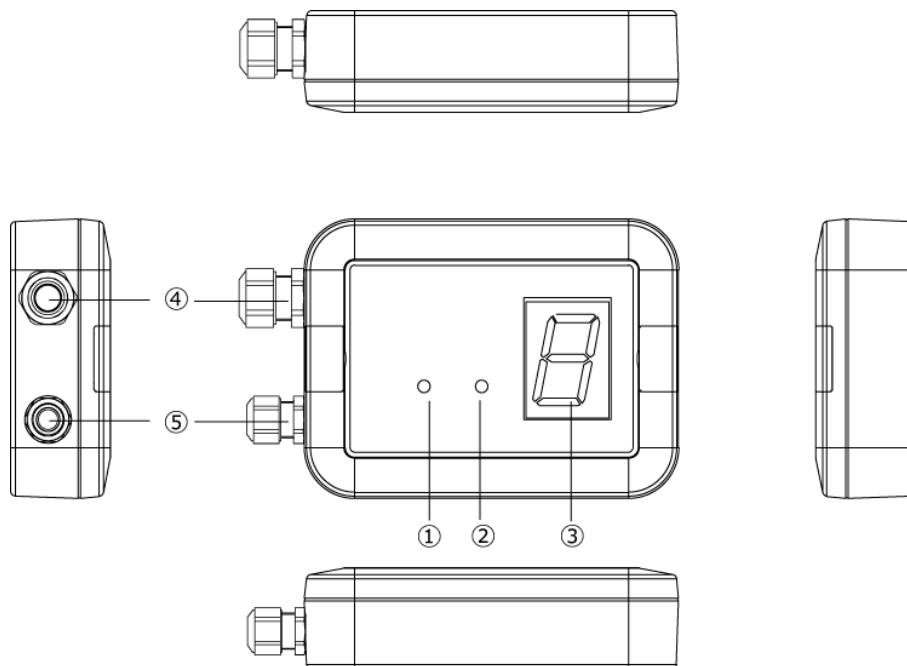

	name	explanation
①	Powered ON LED	Lights up when power input (green)
②	Warning LEDs	Lights up when approaching vehicles equipped with trigger detection boxes (red)
③	7-segment LED	Display tag detections in 7 seg (0 to 7)
④	Output connector	Alarm connection
⑤	Input connector	Power/contact input cable connection