

Count Indicator

MXDU-HT-001

[Instruction Manual 1.0.1]

This product displays the number of tags detected by Hiyari Hunter and notifies the approach of the vehicle equipped with a trigger detection box.

The contents of this document are subject to change without notice for improvement, including product specifications. The contents of this document are as of January 2018.


⚠ Precautions for use

- Please do not remodel or disassemble.
- Do not subject to severe impact.
- Do not leave in a place that touches the hands of the infant.
- Do not put foreign objects in.
- Do not place anything on top of this product.
- Do not use in places with high humidity or dust, oil smoke or steam.


Main specifications

| | |
|------------------------------------|--|
| Supply voltage | DC24V (Supplied by control unit with included relay cable) |
| 7-segment LED | Display 0 to 7 (lights up when tag possession worker approaches) |
| Powered ON LEDs | green |
| Warning LEDs | Red (lights up when vehicle approach detection) |
| Operating temperature range | 0°C~50°C |
| Operating humidity range | 10 to 90% Rh (non-condensing) |
| External dimensions | (W)110mm (D)150mm (H)40mm ※Excluding protrusions |
| quality | 300g ※Excluding connection cable |

connection

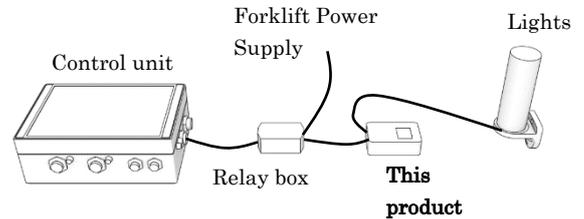

Product appearance and name of each part

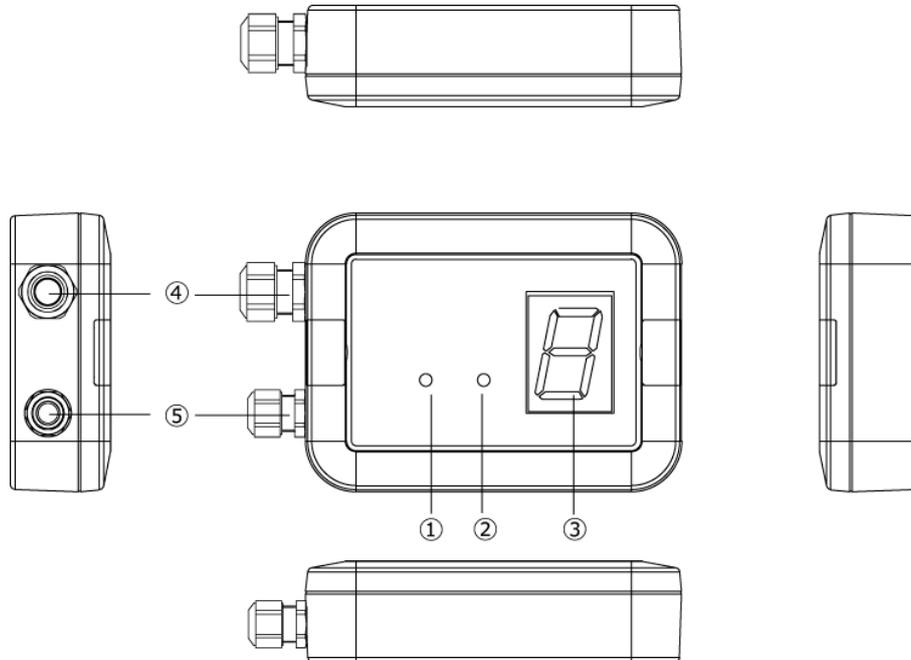

| | name | explanation |
|---|------------------|---|
| ① | Powered ON LED | Lights up when power input (green) |
| ② | Warning LEDs | Lights up when approaching vehicles equipped with trigger detection boxes (red) |
| ③ | 7-segment LED | Display tag detections in 7 seg (0 to 7) |
| ④ | Output connector | Alarm connection |
| ⑤ | Input connector | Power/contact input cable connection |